


## SMTX SERIES

# SMTX 3612™

SMTX 3612 is the product of response to customer demand for highly rugged tags that can be used in harsh and industrial environments and food industry asset management with top performance. The tag is designed to fit into small gaps and meet the identification requirements of metallic surface assets. The robust design protects the industrial PU printing (non-yellowing polyurethane) against chemical attacks of general and abrasive cleaning products (anti-scratch). The small stature of this tag makes it ideal for a broad range of industrial, transportation and asset management applications.

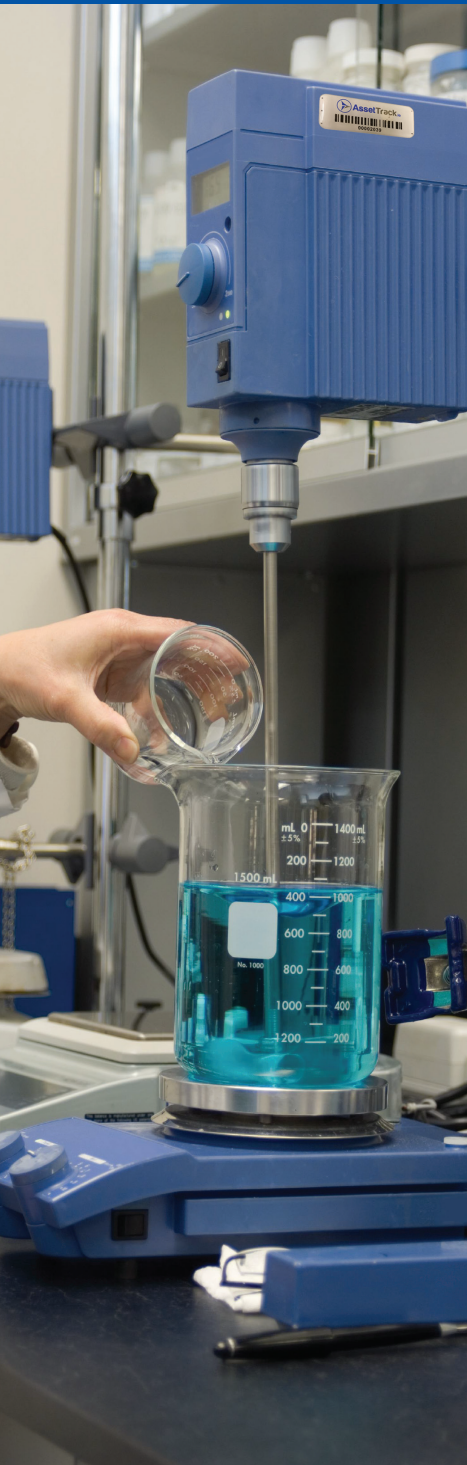


### Overview

The SMTX 3612 tag provides an effective solution for manufacturers, oil & gas, food industry or retail to manage their assets in transit or static.

The use of RFID tags provides better visibility and control over supply chains, improves security of assets in movement and enables automated logistics and lean manufacturing processes.

This special form, rugged tag features a 1 meter read-range when mounted on metal assets and carries up to a 10-year life expectancy.

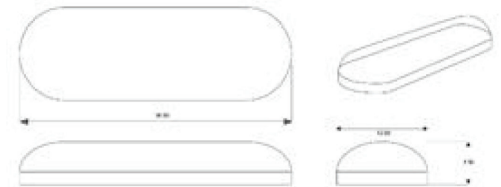

### Features & Benefits

- Easy-to-use RFID tag that can be attached on any surface, including metallic
- With a small footprint, it is well suited for attachment to small spaces commonly found on assets
- Customizable with human readable numbers, barcode/QR code
- Rugged clean resin assures the tag durability and longevity with industry high ingress protection rating of 68
- Supplied with high strength adhesive
- Pre-encoding: Customer-specific encoding of EPC or user memory, locking permanently or with password. SmartX offers a full service bureau for printing tags at point of manufacture.

### Industries

- Food Industry
- Retail and Fast Food Equipment Inventory
- Oil & Gas
- Retail Equipment Rental
- Manufacturing & Automotive
- Construction & Mining
- Facility Management

### Applications

Ideally suited for environments and applications where an extended read range is required and exposure to chemicals, mechanical abuse and temperature/weather extremes are common concerns.

## Specifications

Physical	
Use Case	Both Metallic and Non-metallic Assets
Dimensions	36 x 12 x 3.5mm (1.4" x .47" x .14")
Material	PCB/FR4 Industrial Resin PU, Rigid
Attachment	High Performance Acrylic Adhesive specifically for Metal and Painted Metal Surfaces

Electrical/RF Typical	
Read Range* RF Protocol	On metal up to 1m (3.28 ft) Other materials up to .5m (1.6 ft)
Operating Protocol	UHF, EPC Class 1 Gen 2, ISO 18000-6C 902 - 928 MHz (U.S. Band)
IC Platform	Impinj Monza R6-P
IC Memory	128 bit EPC

Environmental	
Ingress Protection	IP68
Operating Temperature	-40°C to 85°C (-40°F to 185°F)
Application Temperature	-35°C to 85°C (-31°F to 185°F) 241 Bar Water Pressure Washer (3500 PSI Water Pressure Washer)
Shock and Vibration	MIL STD 810-G
Washing resistance	Tolerates industrial washing with standard solvents. It should be tested in final application.

<b>SmartX Part Number</b>	SMTX3612
---------------------------	----------

\*Read ranges are theoretical values that are calculated for non-reflective environment, in where antennas with optimum directivity are used with maximum allowed operating power. Different surface materials may have an effect on performance.

For additional information and technical support contact SmartX Technology Inc.

### DISCLAIMER

THE MATERIALS, PRODUCTS AND SERVICES ARE SOLD SUBJECT TO ITS STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SMARTX MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (I) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (II) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN SMARTX STANDARD CONDITIONS OF SALE, SMARTX AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for its own determination as to the suitability of SmartX products, materials, services, recommendations or advice for its own particular use. Each user must identify and perform tests and analyses necessary to ensure that its finished systems incorporating SmartX products, materials or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of this disclaimer, unless any such modification is specifically agreed to in writing signed by SmartX.

Contact: [tags@SmartXint.com](mailto:tags@SmartXint.com)

©2018 SmartX. All rights reserved.

